



Description:

Illuminate your parking areas, gas stations, warehouse and open spaces with our versatile CP Series Canopy Light. Featuring two small up lights to minimize cave light, optional emergency battery backup, and compatibility with plug-and-play sensors, this product offers unparalleled adaptability and performance. With adjustable CCT and wattage, it's suitable for various projects. Experience reliable, efficient lighting tailored to your needs.



Model:

Optical:

CCT: 3CCT Tunable/ 3000K/4000K /5000K Lumen Efficacy: 140lm/w@3000K/160lm/w@4000K

150lm/w@5000K

Wattage Selectable(±10%@100%power):

Lumen flux(±10%):

100%,75%,50%,30%(selectable) 4000/6400/9600/12800/

16000@4000K Ra70 (LM)

LED Type: LED 2835

CRI: Ra70 (Ra80 optional)



Electrical:

Rated Power: 25/40/60/80/100W

Input voltage: 100-277VAC, 120-347VAC 50 / 60 Hz Beam angle: U00C09(Type V) U000C07(Type V)

Power factor: >0.95

Life:

50,000 Hrs Lumen maintenance: 2 Years Warranty:



General:

Dimmable Solution: 0-10V IP65 IP: IK08 IK:

 -30° C to + 50° C(-22° F to +122°F) Operating temperature:

Fixture color Availability:

Applications: For indoor and outdoor lighting applications

> like indoor parking lot, underground parking lot, etc.

























DIMENSIONS













ACCESSORIES

Mounting Options

PIR sensor

PC Φ61*28mm

Motion Sensor

SURFECE MOUNTING

CONDUIT MOUNTING










PHOTOMETRY

25W/40W/60W beam angle

80W/100W beam angle




U00C09 U00C07





Up Light Module

CP02 has uplight s standard, which would reduce cave effect

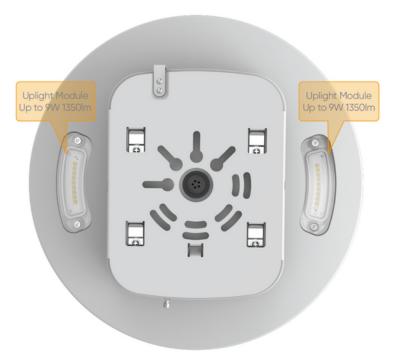

EMB Available









3000K, 4000K, 5000K adjustable



· 4 Wattage Adjustable


30%, 50%, 75%, 100% adjustable













Microwave & PIR Sensor

Plug-and-play Microwave and PIR sensor control make it more energy-saving based on 140lm/w and saves your electric bills.







APPLICATIONS

