



NAME: PIR Motion Sensor



OVERVIEW:

- Applicable to 12V/24V cabinet lights.
- Stable quality, strong anti-interference and anti-attack capabilities.
- Widely utilized in conjunction with cabinets, wardrobes, wine cabinets and similar furniture.

Working Mode

When a person enters the range, the light turns on, when leaving, the light turns off after 30 seconds.

APPROVED LED LUMINAIRES:

It is compatible with 12V and 24V low-voltage cabinet lights and LED strips. Standard Dupont connectors are used, enabling quick connection and use.

TECHNICAL PARAMETERS:


Model	SRPMA011224CX
Name	PIR Motion Sensor
Sensor Size	D12*L27mm , Hole Size:10mm
Warranty	2 Years
Certification	CE ROHS
Installation height	1-1.5M
Delay time	30 seconds

Work Voltage	12-24V DC
Max Load	12V<60W,24V<100W
Sensor Range	1-3 Meters, 60 Degree,30s Delay Turn-off
Working Mode	People come to light, people go (delay 30 seconds) light off
Accessories	2 pcs screws, 1 pcs holder
Wire length	200cm sensor wire, 20cm power wire , 20cm male connector wire for cabinet light



PRODUCT SIZE:

TOP VIEW

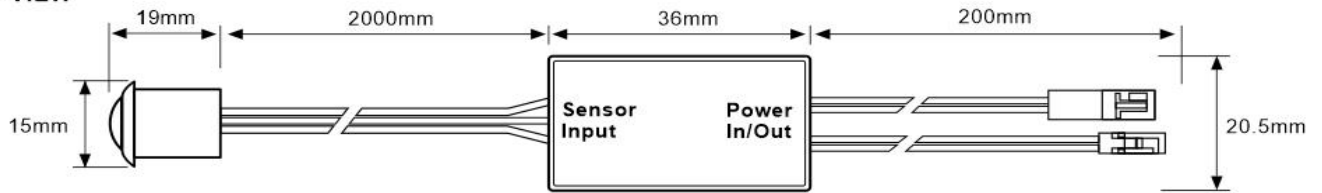


SIDE VIEW



Dimensional error:2%

WIRING DIAGRAM:

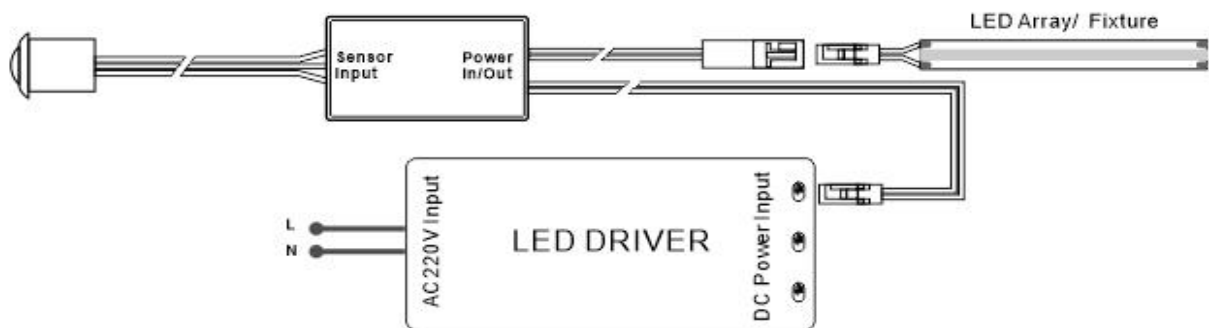

INSTALLATION DIAGRAM:

