



NAME: Touch Sensor



OVERVIEW:

- Applicable to 12V/24V cabinet lights.
- Stable quality, strong anti-interference and anti-attack capabilities.
- Widely utilized in conjunction with cabinets, wardrobes, wine cabinets and similar furniture.

Working Mode

Touch it briefly to turn the light on or off. When the light is on, press and hold the switch to adjust the brightness.

APPROVED LED LUMINAIRES:

It is compatible with 12V and 24V low-voltage cabinet lights and LED strips. Standard Dupont connectors are used, enabling quick connection and use.

TECHNICAL PARAMETERS:


Model	SRTOA011224CX
Name	Touch Sensor
Sensor Size	D12*L27mm , Hole Size:10mm
Warranty	2 Years
Certification	CE ROHS
Delay time	/
Installation height	/

Work Voltage	12-24V DC
Max Load	12V<60W,24V<100W
Sensor Range	/
Working Mode	Turn on/off, Dimming
Accessories	2 pcs screws, 1 pcs holder
Wire length	200cm sensor wire, 20cm power wire , 20cm male connector wire for cabinet light




PRODUCT SIZE:

TOP VIEW

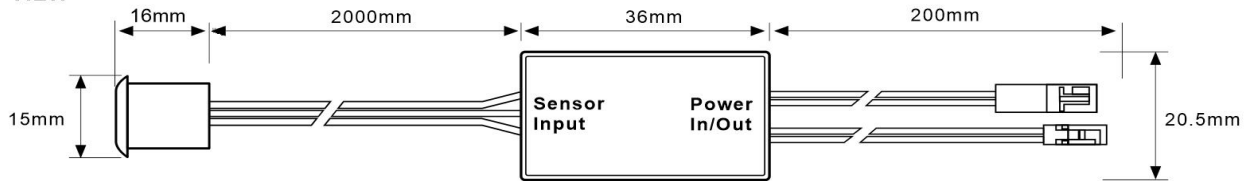


SIDE VIEW

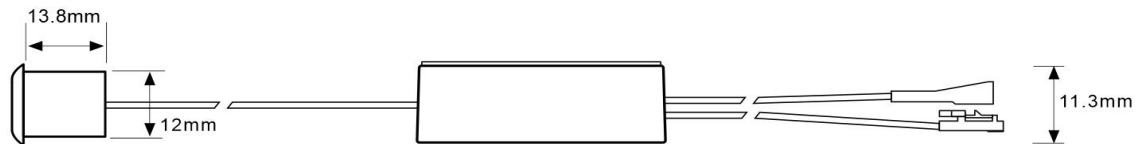

Dimensional error:2%

WIRING DIAGRAM:

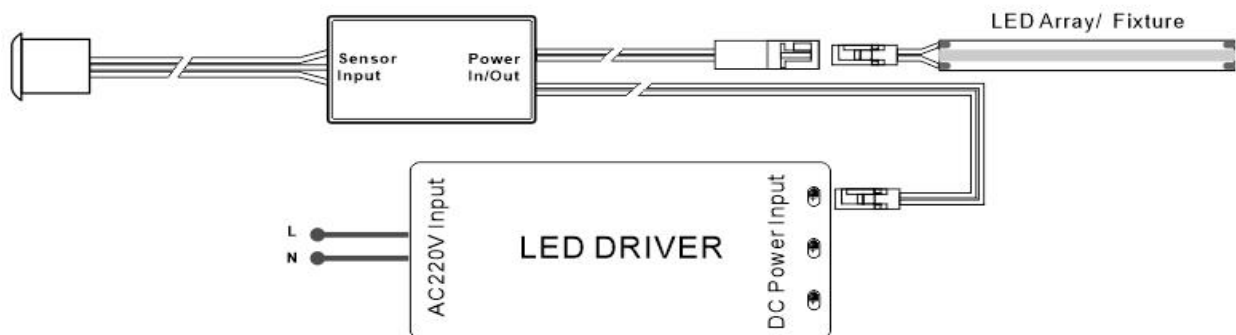

INSTALLATION DIAGRAM:

