



**LuminaCast Diffuse Concrete Step Light 8"&13"**



**Description:**

The concrete pour step/wall light offers a sleek and contemporary lighting solution for concrete structures, retaining walls, steps, and stairs. With its low trim profile, it blends seamlessly with the surrounding surfaces. This fixture is highly popular due to its decent power and lumens output. Its easy installation and low maintenance make it a practical choice. The concrete pour step/wall light enhances the ambiance and safety of outdoor spaces effortlessly, adding a stylish touch to any environment.



**Model: SPLXX0324003KKP**

**Optical:**

CCT: 3000K / 4000K / 6000K  
 Light source: L0180C010AR - 20×SMD5050  
 LED Type: SMD5050  
 CRI: >80

**Electrical:**

Rated Power: 2.4W                      4.8W  
 Lumen out put: 34lm@3K      68lm@3K  
 Input voltage: 24VDC / 120VAC / 110-277 VAC  
 Lens degree: 120°  
 LED driver: Constant Voltage Input ,Constant Current Output



**Life:**

Lumen maintenance: 50,000 Hrs.  
 Warranty: 3 Years Limited warranty

**General:**

IK: 09  
 IP: IP65 Outdoor  
 Finish color Availability: Brushed Stainless steel  
 Front Plate: Hard chrome plated Stainless steel SUS316  
 Light Housing: 12# Die-casting grey powder coated aluminum. T=60-80µm Adhesion of ISO class 1/ASTM class 4B  
 Application: Concrete Step / Retaining walls  
 Certification: cETLus For 24VDC Input  
 Operating Temperature: -20°C~40°C










**LuminaCast Diffuse Concrete Step Light 8"&13"**

**Product Size:**

**1014 8"**

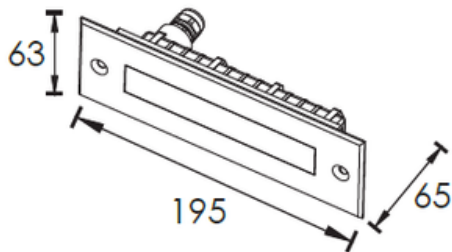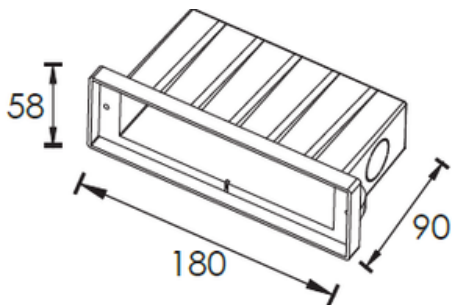

**2014 13"**

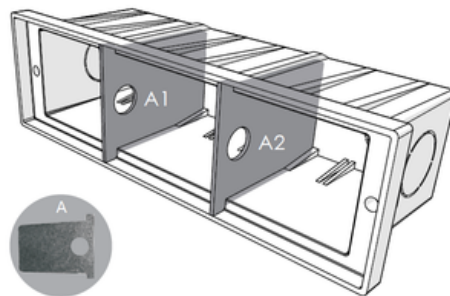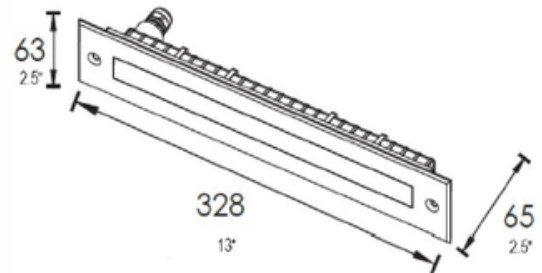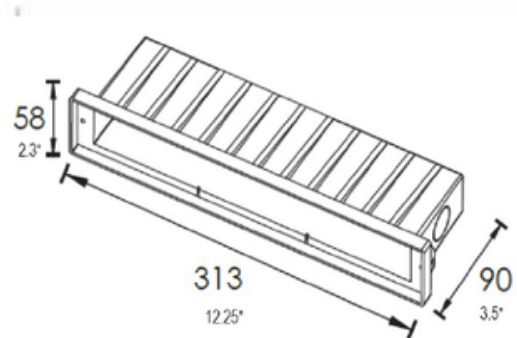





**LuminaCast Diffuse Concrete Step Light 8"&13"**

**PHOTOMETRIC:**

**Model : 1014 8"**

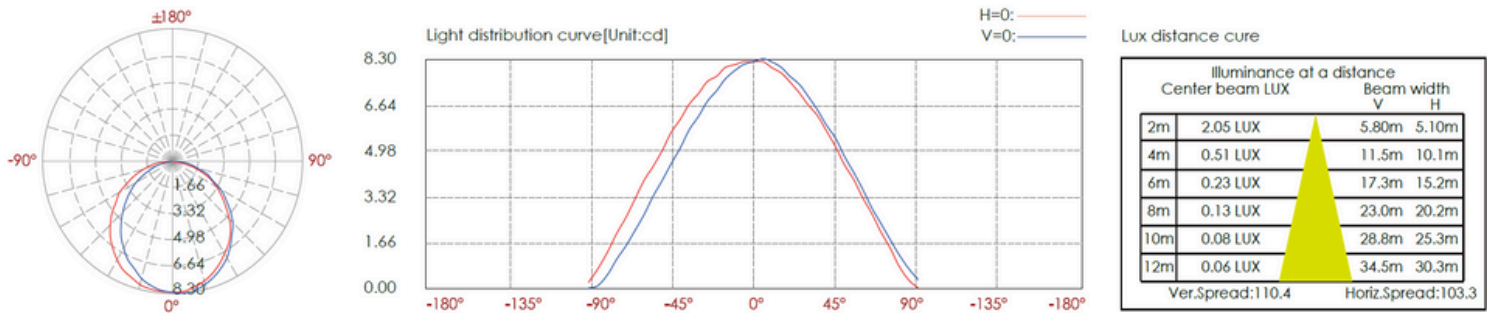

**Model : 2014 13"**

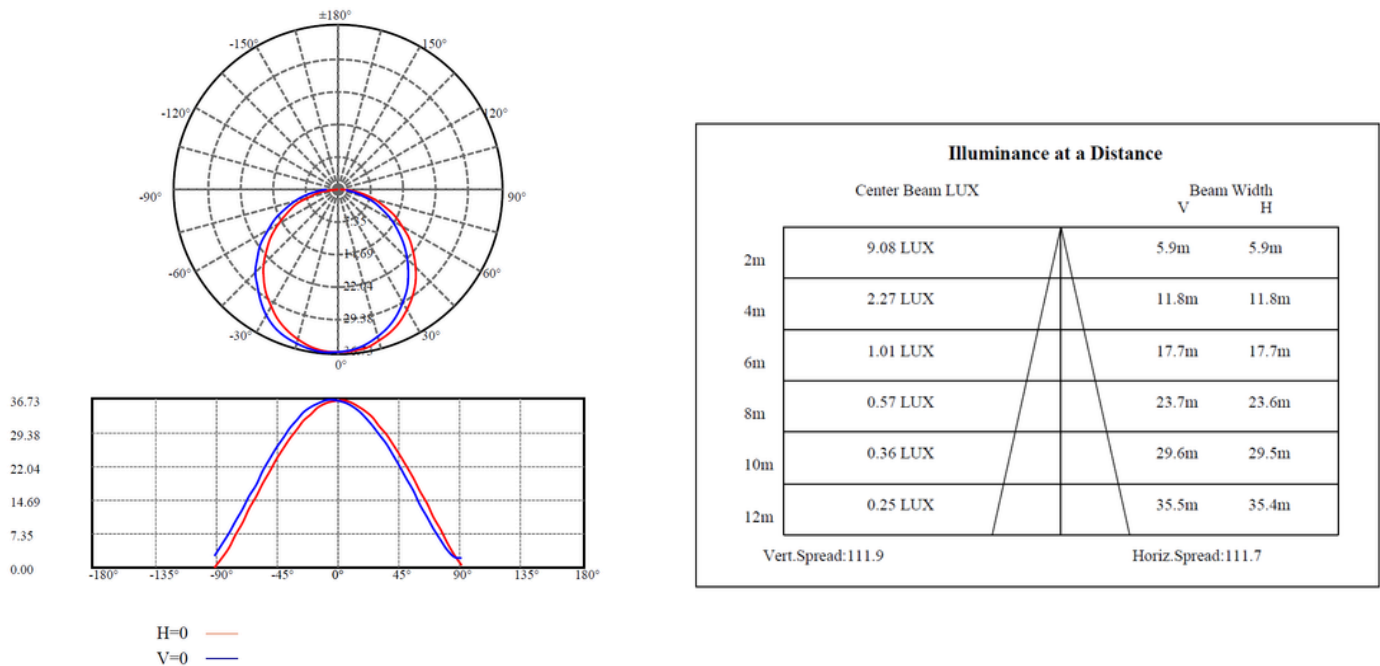



**LuminaCast Diffuse Concrete Step Light 8"&13"**

Example: Spl1014-03-24-30-FG

Model	Wattage	Voltage	CCT	LENS
SPL1014	34lm@2.4W -3000K :03 125lm@2.4W-3000K-FG:03 ①	24VDC :24 110-277VAC:110	2700K:27 3000K:30 4000K:40 6000K:60	Standard : S Frosted Glass: FG ①
SPL 2014	68lm@4.8W-3000K :05 250lm@4.8W-3000K-FG :05 ①			

①: Lumen increase achieved by using frosted glass instead of painted plastic as standard

